

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
18 November 2004 (18.11.2004)


PCT

(10) International Publication Number  
**WO 2004/099055 A1**

- (51) International Patent Classification<sup>7</sup>: **B66B 7/04**
- (21) International Application Number:  
PCT/US2003/010563
- (22) International Filing Date: 7 April 2003 (07.04.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): OTIS ELEVATOR COMPANY [US/US]; Ten Farm Springs Road, Farmington, CT 06032 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): PEREZ, Jose Sevilleja [ES/ES]; C/La del Monojo de Rosas, No. 95, 28041 Madrid (ES).
- (74) Agent: GASKEY, David J.; Carlson, Gaskey & Olds, 400 W. Maple Rd., Ste. 350, Birmingham, MI 48009 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declaration under Rule 4.17:  
— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: ELEVATOR ROLLER GUIDE

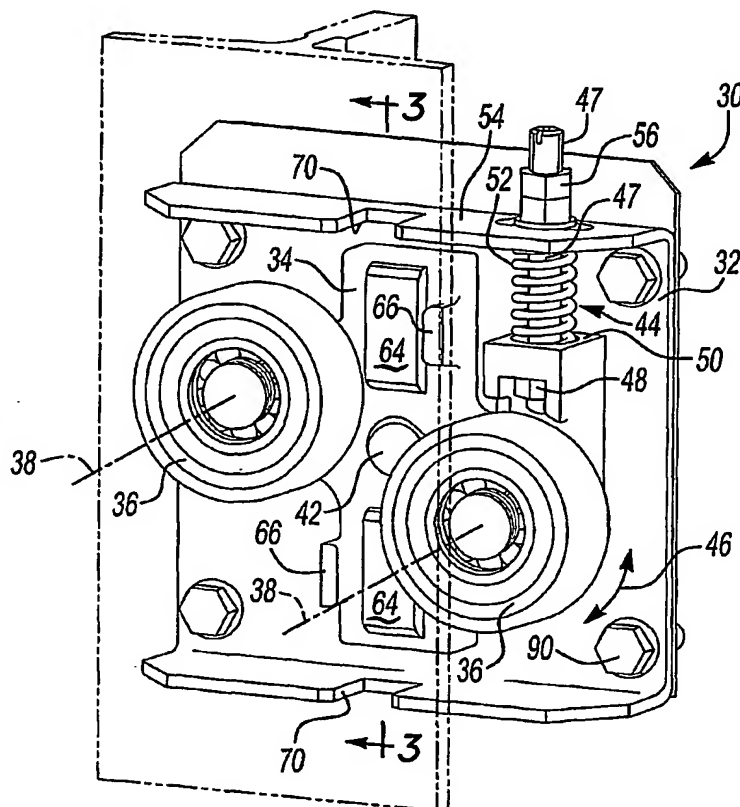

(57) Abstract: A guiding device (30) for an elevator system (20) facilitates guiding a cab (22) along guide rails (24). The guiding device (30) includes a roller mount (34) that supports rollers (36) such that the rollers remain a fixed distance from each other. A biasing member (44) urges the mount (34) in a direction that maintains contact between the guide rail (24) and the rollers (36) and facilitates centering the guiding device (30) and the cab (22) relative to the guide rails (24).



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*